

Flowfast Terrosso (4 mm) 1-3 mm Flake

A seamless, decorative, hard wearing acrylic resin floor finish, developed for high traffic retail environments requiring a new floor finish under a fast turnaround.



Aesthetically Attractive:

Decorative floor finish that delivers the wow-factor underfoot.



Rapid Installation:

MMA catalyst speeds up cure time, reducing construction schedules.



UV Resistant:

Exhibits excellent resistance to UV light, minimising yellowing.



Resistant:

Good resistance to foot and rubber wheeled traffic, scratching and staining.



Beige 112 (uses RAL 9010 pigment)



Blue 511 (uses RAL 5023 pigment)




Cream 111 (uses RAL 9010 pigment)



Dark Grey 714 (uses RAL 7024 pigment)



Light Grey 711 (uses RAL 9010 pigment)



Mid Grey 713 (uses RAL 7004 pigment)



Red 311 (uses RAL 9010 pigment)



Signal Grey 712 (uses RAL 7004 pigment)

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.


Technical Profile*

REACTION TO FIRE	
EN 13501-1	C _{fl} -s1
IMPACT RESISTANCE	
EN ISO 6272	10 Nm
TEMPERATURE RESISTANCE	
Tolerant of sustained temperatures up to 50°C	
WEAR RESISTANCE	
EN 13892-5	<1 cm ³
WATER PERMEABILITY	
Karsten test	Nil (impermeable)
BOND STRENGTH	
EN 13892-8	>2.5 N/mm ²
SLIP RESISTANCE** (in accordance with HSE and UKSRG guidelines)	
EN 13036-4 / BS 7976-2 (Typical values for 4-S rubber slider)	Dry >40 low slip potential
BS 8204-6 / FeRFA	
Type 4	
SPEED OF CURE***	
Walk on	1 hr
Full traffic & chemical cure	2-3 hrs

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

**The slipperiness of flooring materials can change significantly due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry). Please contact our Technical Department for further details and specifications.

***Cure at temperatures in the range 0°C to +30°C can be achieved by altering the quantity of catalyst used. For applications below 0°C, please consult Technical Department.

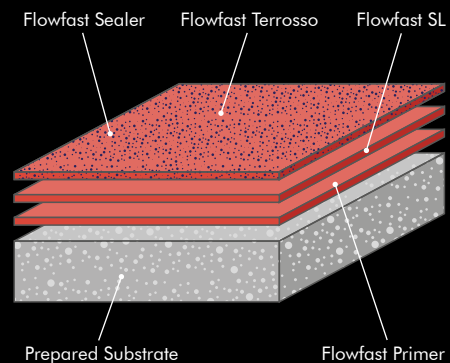

For any other information please contact your local Flowcrete Technical Department.

Model Specification

Product	Flowfast Terrosso
Finish	Satin

Preparatory work and application in accordance with manufacturer's instructions.

Products Included in This System

Primer	Flowfast Primer @ 0.3-0.5 kg/m ²
Scatter	Natural Quartz 0.4-0.8 mm @ 0.3 kg/m ²
Flowfast SL	Flowfast Binder @ 1.5 kg/m ² mixed with: Flowfast Pigment Powder @ 3% weight of Flowfast Resin Flowfast SNL Filler @ 3.0 kg/m ²
Scatter	Flowfast Flake @ 0.5 kg/m ² (to excess)
Sealer	Flowfast Sealer @ 0.3 kg/m ² per coat (3 coats) to obtain a smooth surface

Consult individual Product Data sheets for information on Flowfast Catalyst levels.

Detailed application instructions are available upon request.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm², free from laitance, dust and other contamination. The substrate should be dry to 95% RH as per BS8203 and free from rising damp and ground water pressure. Flowfast Damp Primer can be used for substrates up to 100% RH (surface dry).

Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme.

Obtain details of our approved contractors by contacting our customer service team or enquiring via our website www.flowcrete.co.uk

Aftercare

Clean floors regularly using a rotary scrubber in conjunction with a mildly alkaline detergent.

Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Notes

No resin system is totally colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in very light colours but does not compromise the product's physical or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change.

Intensively coloured products (e.g. hair colourants, medical disinfectants etc.) and plasticizer migration (e.g. from rubber tyres) can lead to irreversible discolouration in the sealer. Please contact our Technical Services Department for further advice.

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Flowcrete UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Flowcrete UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

System Datasheet written for Flowcrete UK Ltd. Please consult Technical Team in your own country region for specific details. [05/12/18, 01 UK]